



Tiefenmesssschieber mit Haken

Digital depth gauge with hook

- DIN 862
- Auflösung 0,01 mm/0,0005 inch
- Auto off
- mit Feststellschraube
- Messbrücke 100 mm
- Batterie CR2032
- inkl. Etui
- Haken: Länge 5 mm, Breite 2 mm

- DIN 862
- Resolution 0,01 mm/0,0005 inch
- Auto off
- With locking screw
- Measurement bridge 100 mm
- Battery CR2032
- incl. box
- hook: length 5 mm, width 2 mm

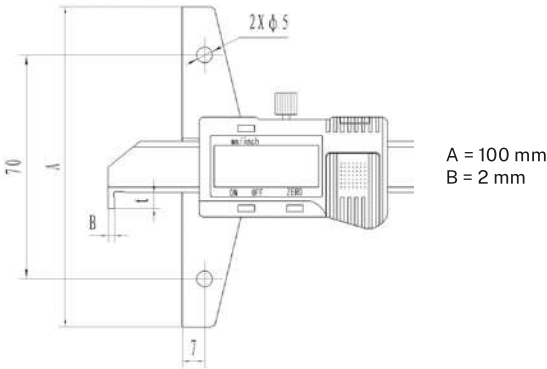

> mm <	mm	inch	mm	mm	No.
150	0,01	0,0005	100	16 x 4	100-816
200	0,01	0,0005	100	16 x 4	100-817
300	0,01	0,0005	100	16 x 4	100-818

Tiefenmesssschieber mit Haken ABS

Digital depth gauge with hook ABS

- DIN 862
- Schutzart IP54
- Auflösung 0,01 mm/0,0005 inch
- Auto off
- mit Feststellschraube
- Messbrücke 100 mm
- Batterie CR2032
- inkl. Etui
- Haken: Länge 15 mm, Breite 10 mm

- DIN 862
- Protection class IP54
- Resolution 0,01 mm/0,0005 inch
- Auto off
- With locking screw
- Measurement bridge 100 mm
- Battery CR2032
- incl. box
- hook: length 5 mm, width 2 mm



120-441

> mm <	mm	inch	mm	mm	No.
300	0,01	0,0005	100	15 x 3,5	120-441
500	0,01	0,0005	100	15 x 3,5	120-442

> mm <

Messbereich
Ablesung
Brückenlänge
Querschnitt Messschiene

Range
Reading
Length of base
Measuring rod profile