

## Wheel change set

750NR/200/3/1



Product no. **96507216**  
GTIN **4018754353781**  
Model **Radmontage-Set 750NR/  
200/3/1**



### Label.

Wheel change set Model 750NR/200/3/1 5 pcs.

### Features.

- high-quality tool set specially designed for wheel changes
- with fixed, reversible 1/2" fine-tooth ratchet
- in a sturdy plastic box

#### **Key features of torque wrench No. 750NR/200 (SEVENFIVEZERO)**

- tactile with dual stop signal
- 60 teeth
- resilient, long-lasting spring mechanism
- fast, precise adjustment with QuickSelect quick adjustment
- trigger mechanism insensitive to continued loading after triggering, and loosening of already tightened joints (up to the maximum range limit of the torque wrench)
- locking of the specified torque setting
- dual scale N·m/ft·lb
- ready for operation again immediately after release
- calibration with perfectControl® calibration device No. 7791, 7794 or calibration system No. 7706
- for controlled clockwise tightening
- with 2-component handle
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **max. measurement error  $\pm 4\%$**

#### **Contains 5-pieces:**

1 torque wrench with ratchet 1/2" **No. 750NR/200**: measurement range: 40-200 N·m; 30-145 ft·lb

3 IMPACT wheel nut sockets **No. 51IMP K**: 17 mm (green); 19 mm (blue); 21 mm (red)

1 extension, 1/2" **No. 509/5**: L. 130 mm

## Advantages.

Solid standard equipment for quick and stress-free wheel changes - ideal for use in workshops and for private use.

Clearly audible and tangible "click" when the target torque is reached, which can be conveniently and precisely adjusted via a rotary knob at the end of the handle (1 turn = 10 N·m).

Sturdy plastic case with carrying handle and custom-fit inlay for safe transport and storage.

With its SEVENFIVEZERO torque wrench with 1/2" fine-tooth ratchet and 3 wheel nut sockets (size 17, 19, 21) with plastic sleeve, the set ensures maximum protection on sensitive alloy wheels.

The extension and the wheel nut sockets with a ball lock ensure high power transmission, even for difficult or low-lying bolted connections.



## Product highlights.



### Complete wheel change set for vehicle wheel changes.

It includes the mechanical torque wrench 750NR/200 with tactile release, a durable and resilient spring mechanism, and a fine-tooth ratchet. The 3 robust IMPACT wheel nut sockets with protective sleeves, combined with the socket extension, enable convenient and damage-free use.



### Relaxed tightening.

The 750NR is characterised by a durable spring mechanism that ensures a reliable and effortless tightening process at all times. The release torque can be conveniently and precisely adjusted via a rotary knob in 10 N·m increments. A clearly readable scale and the tactile feedback further ensure accurate and controlled application.



### Gentle wheel changing.

The special IMPACT sockets with plastic sleeves enable gentle wheel changes, e.g. on sensitive alloy rims.



### Colour coding.

The protective sleeves of the IMPACT wheel nut sockets are marked with different colours for immediate identification of the correct size.



**Superior quality.**

Our tool is made of high-quality and durable Chrome Alloy Steel. The durable and low-maintenance design ensures a long service life and reliable performance, even in demanding conditions.



**Practical storage and transport.**

Our tools are stored in a sturdy carrying case made of high-quality plastic. A foam insert secures the components during transport. The lightweight case has a practical carrying handle and is resistant to oil, grease and other chemicals typically found in a workshop environment.

**Technologies and features.**



**2-component handle**

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol.



**QuickSelect**


Lightning-fast target value setting: Unlock the adjustment knob, set the value and lock the knob again.



**Spring mechanism with the "click"**

Our torque wrench uses a toggle lever as the switching mechanism. When the set torque is reached (click-type), the spring force is exceeded, causing the mechanism to slip and strike. This produces a clearly audible and perceptible "click".

**Technical Drawing.**

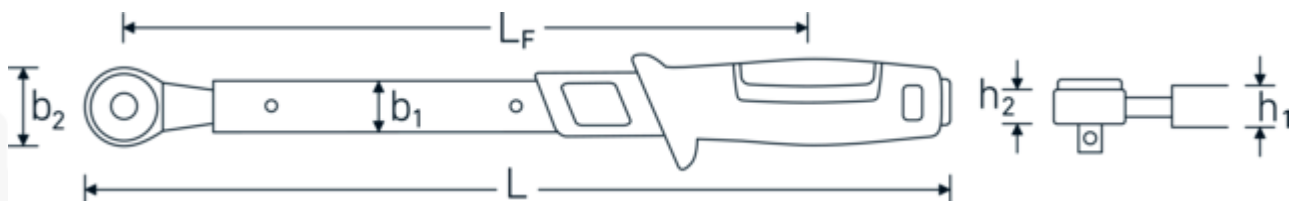

**Technical Attributes.**

Number of tools	5 pcs.
Width mm (b)	81 mm

**Logistics data.**

Depth mm (IFS)	685
Width mm (IFS)	95

<b>Height mm (h)</b>	66 mm	<b>Height mm (IFS)</b>	75
<b>Length mm (L)</b>	680 mm	<b>WEEE/ElektroG</b>	nicht ear-pflichtig
		<b>Length (packed, mm)</b>	685
		<b>Width (packed, mm)</b>	95
		<b>Height (packed, mm)</b>	75
		<b>Volume (packed, dm3)</b>	4.880625 dm3
		<b>Art. no.</b>	96507216
		<b>Weight (gross, kg)</b>	3,080
		<b>Weight PAP (kg)</b>	0,140
		<b>Weight PVC (kg)</b>	0,000
		<b>GTIN</b>	4018754353781
		<b>Country of origin AWR</b>	GERMANY
		<b>Region of origin</b>	Nordrhein-Westfalen
		<b>Customs tariff no.</b>	82041100
		<b>Packing standard</b>	1
		<b>Weight</b>	2940 g

## Variants.

Art. no.	Model no. (ERP)	Description	GTIN
96507216	Radmontage-Set 750NR/200/3/1	Wheel change set Model 750NR/ 200/3/1 5 pcs.	4018754353781

## GTIN-Code.



## Images.



**STAHLWILLE Eduard Wille GmbH & Co. KG**

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200  
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal  
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal