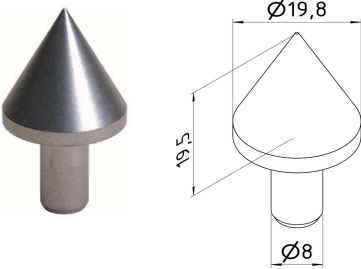



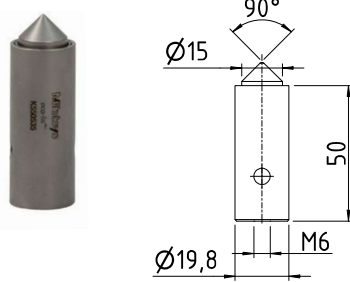






Positioning components

		APPLICATION	PRODUCT LINES
<p>Part No.: K550365 Weight 26 g Cone receiver ø 20 mm For receiving parts in bores or centerings etc.</p>			<p>eco-fix eco-fix^{plus}</p>
<p>Part No.: K550261 Weight 6 g Cone receiver ø 12 mm For receiving parts in bores or centerings etc.</p>			<p>eco-fix</p>
<p>Part No.: K551323 Weight 90 g Spring-loaded cone support Used as a centering surface support in bores drilling and center holes.</p>			<p>eco-fix eco-fix^{plus}</p>
<p>Part No.: K550996 Weight 26 g Center mount ø 20 mm For receiving e.g., rotationally symmetrical components without center hole.</p>			<p>eco-fix eco-fix^{plus}</p>
<p>Part No.: K550995 Weight 7 g Center mount ø 12 mm For receiving e.g., rotationally symmetrical components without center hole.</p>			<p>eco-fix</p>