


ALESO

Standard bore gauge
Alesometro standard

BORE GAUGES ALESAMETRI

- Mobile tip in MD (WIDIA) integral and with radius
 - Interchangeable fixed tips with sphere MD (Widia)
 - Handle with insulation chamber
 - $\varnothing 8$ mm dial gauge clamping shank
 - Supplied with dial gauge 0,01 $\varnothing 60$
- Puntale mobile MD (Widia) integrale raggiato
 - Puntali fissi intercambiabili con sfera MD (Widia)
 - Impugnatura con camera di isolamento
 - Attacco per comparatore $\varnothing 8$ mm
 - Di serie comparatore 0,01 $\varnothing 60$

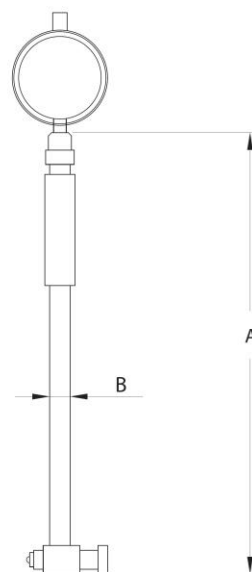

Mobile probe
Puntale mobile in widia raggiato

Probe r8
Puntale r8



Article	Range (mm)	Hole depth (mm)	A	B	Accuracy μm^*	Repeatability μm	Code	Kg
ALESO 15-35	15-35	175	200	8	± 1	1	D00005	0,080
ALESO 30-100	30-100	250	275	13	± 1	1	D00010	0,190
ALESO 50-160	50-160	250	280	13	± 1	1	D00015	0,220
ALESO 50-210	50-210	380	397	13	± 1	1	D00020	0,270
ALESO 100-300	100-300	350	375	15	± 1	1	D00025	0,460
ALESO 100-500	100-500	650	715	15	± 1	1	D00030	0,730
ALESO 190-1000	190-1000	650	725	15	± 1	1	D00035	1,100
ALESO 220-1000	220-1000	650	725	15	± 1	1	D00040	1,100

*Accuracy on 0.5 mm measuring travel (excluding dial gauge)

*Precisione con escursione di 0,5 mm (escluso comparatore)